alozo .	PRO COMMERCIAL REFRIGERATION 203 Kelsey Ln., Building G Tampa, FL 33619 813-502-0300	PROJECT: MODEL #: ITEM #:	QTY:	
OMMERCIAL REFRIGERATIO	MERCIAL REERIGERATION Toll Free 1-888-VALPRO-8 www.ValproRefrigeration.com		AVAILABLE W/H:	
NOTAL REFRIGE	sales@ValproRefrigeration.com	APPROVAL:		
GLASS DOOR MERCHANDISER MODEL: VP1F-23HC SWING I				

Our line of merchandisers utilize reliable energy efficient technology and provide an attractive well illuminated point of purchase while maintaining precise temperatures. This model will provide many years of worry free service and delivers cost saving eco-friendly energy efficiency. All Valpro products are manufactured under strict ISO9001 standards for quality assurance, and to consistently deliver to our customers products that satisfy all expectations. All our products are operated, extensively monitored, and undergo rigorous inspection prior to packaging and shipping.

FEATURES

- Energy saving vacuum-insulated triple pane low E -glass door with heat reflecting film
- Bright LED full door length internal cabinet lighting
- Bright LED back-lit front panel
- Standard door locks for added security
- Self-closing door, remain open past 90° feature
- Snap-in magnetic door gaskets removable and replaceable without tools for ease of cleaning
- White baked enamel steel exterior, with white baked enamel aluminum interior and 304 stainless steel floor
- Four heavy duty wire shelves supported by pilasters for easy adjustability', 1/2" increments
- Four 1" wheels with front leg levelers
- High density foamed in-place CFC free polyurethane insulation
- Front mounted electronic thermostat digitally controlled temperature system maintains optimum temperature with easily viewed LED display
- Removable bottom grill slide-out condensing unit for easy maintenance
- Automatic defrost and condensate evaporation system
- ETL sanitary certified to ANSI/NSF standard 7







FREEZER



Model:

VP1F-23HC

One Section - Swing Door - 23 cu. ft. Capacity

Technical Data

Dimensional Data

Exterior Dimensions	26.8"W x 31.9"D x 79.5"H	
Interior Dimensions	23"W x 30"D x 55.5"H	
Net Storage Capacity	23 cu. ft.	
Net Weight	302 lbs.	FRO
Crated Weight	352 lbs.	
Shipping Dimensions	28.3"W x 34.8"D x 84.6"H	

Refrigeration Data


Temperature Range	-10°F to +10°F
Refrigerant	R-290
Refrigerating System	Capillary Tube
Temperature Controller	Digital
Horsepower	1/2

Construction Data

Exterior Material	White Baked Enamel Steel
Interior Floor Material	304 Series Stainless Steel
Interior Wall Material	White Baked Enamel Aluminum
Insulation	CFC Free Polyurethane
Shelves	4 Heavy Duty Epoxy Coated

Electrical Data

Amps	8
Voltage/Frequency/Phase	115V/60Hz/1
Plug Type	NEMA 5-15P
Electrical Cord Length	8 ft.

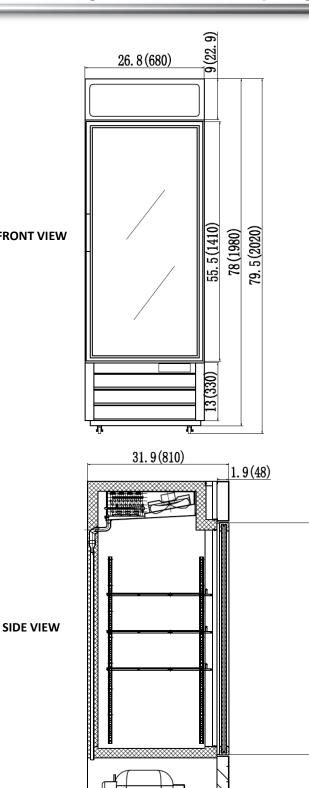

Specifications contained in this sheet are subject to change without notice. This equipment is intended for storage and display of packaged products only and for use in ambient temperatures not exceeding 86°F.

Valpro Commercial Refrigeration 203 Kelsey Ln., Building G Tampa, FL 33619



Tel: 813-502-0300 1-888-VALPRO-8 www.valprorefrigeration.com

Intertek Intertek