

VALPRO COMMERCIAL REFRIGERATION

203 Kelsey Ln., Building G Tampa, FL 33619 813-502-0300

Toll Free 1-888-VALPRO-8 www.ValproRefrigeration.com sales@ValproRefrigeration.com

PROJECT:	
MODEL #:	
ITEM #:	QTY:
AVAILABLE W/H:	
APPROVAL:	

GLASS DOOR MERCHANDISER

MODEL: VP3R-72M

SWING DOOR REFRIGERATOR

Our line of merchandisers utilize reliable energy efficient technology and provide an attractive well illuminated point of purchase while maintaining precise temperatures. Triple pane full glass doors imparts an esthetic modern design to showcase illuminated contents while delivering cost saving eco-friendly energy efficiency. All Valpro products are manufactured under strict ISO9001 standards for quality assurance, and to consistently deliver to our customers products that satisfy all expectations. All our products are operated, extensively monitored, and undergo rigorous inspection prior to packaging and shipping.

FEATURES

- Energy saving vacuum-insulated triple pane low
 E-glass heated doors with heat reflecting film
- Bright LED full door length internal cabinet lighting
- Standard door locks for added security
- Self-closing doors remain open past 90° feature
- Snap-in magnetic door gaskets removable and replaceable without tools for ease of cleaning
- White baked enamel steel exterior, with white baked enamel aluminum interior and 304 stainless steel floor
- Twelve heavy duty wire shelves supported by pilasters for easy adjustability', 1/2" increments
- Six 1" wheels with front leg levelers
- High density foamed in-place CFC free polyurethane insulation
- Front mounted electronic thermostat digitally controlled temperature system maintains optimum temperature with easily viewed LED display
- Removable bottom grill slide-out condensing unit for easy maintenance
- Automatic defrost and condensate evaporation system
- Energy Verified and ETL sanitary certified to conform with NSF Standard 7









Model: VP3R-72M

Glass Door Merchandiser Refrigerator

Three Section - Swing Door - 72 cu. ft. Capacity

Technical Data

Dimensional Data

Exterior Dimensions	81"W x 33.5"D x 79.5"H
Interior Dimensions	76.4"W x 27.6"D x 53.2"H
Net Storage Capacity	72 cu. ft.
Net Weight	617 lbs.
Crated Weight	741 lbs.
Shipping Dimensions	82.5"W x 35.8"D x 84.6"H

Refrigeration Data

Temperature Range	33°F - 41°F
Refrigerant	R-290
Refrigerating System	Capillary Tube
Temperature Controller	Digital
Horsepower	1/2

Construction Data


Exterior Material	White Baked Enamel Steel
Interior Floor Material	304 Series Stainless Steel
Interior Wall Material	White Baked Enamel Aluminum
Insulation	CFC Free Polyurethane
Shelves	12 Heavy Duty Epoxy Coated

Electrical Data

Amps	7.5
Voltage/Frequency/Phase	115V/60Hz/1
Plug Type	NEMA 5-15P
Electrical Cord Length	8 ft.

2057 (81")
FRONT VIEW

(800001)

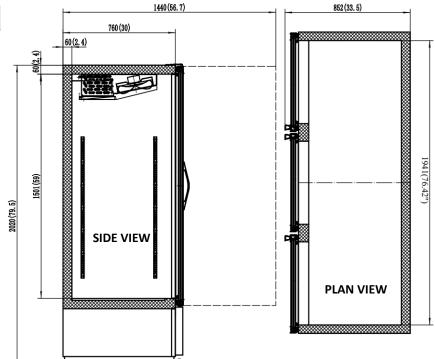





Specifications contained in this sheet are subject to change without notice. This equipment is intended for storage and display of packaged products only and for use in ambient temperatures not exceeding 86°F.



